

PACKING LIST



Body

Leg



Leg Pouch

Manual



Wrench



Oil Seal



Bag



Shoulder Strap



COMPANY & INFORMATION

811 Ezen Mechazone
2979 Hagun-ri Yangchon-myeon
Gimpo-si Gyeonggi-do S.KOREA
TEL: 82-708-630-6464 / FAX: 82-2-6008-0820

WWW.VARAVON.COM

e-mail: varavon@naver.com

MADE IN KOREA

SLIDECAM S



- Manual -






VARAVON

SETTING & ASSEMBLING




Slim & Light Slider

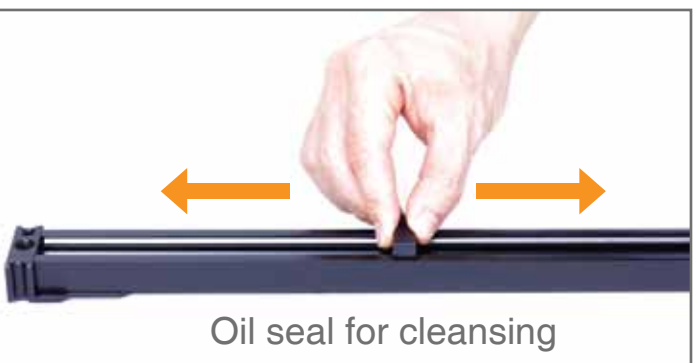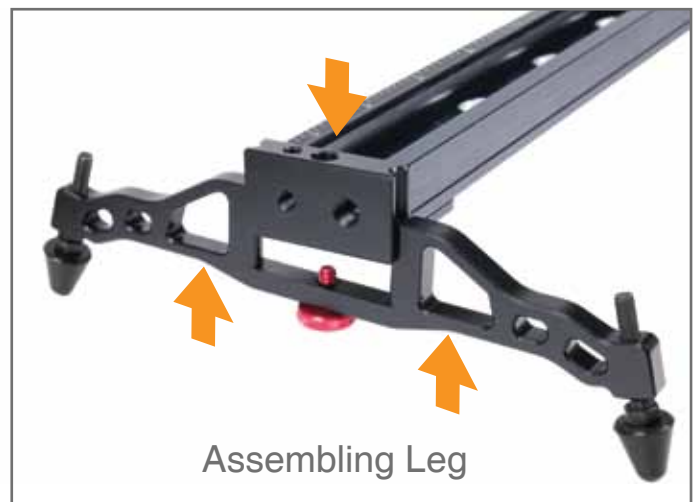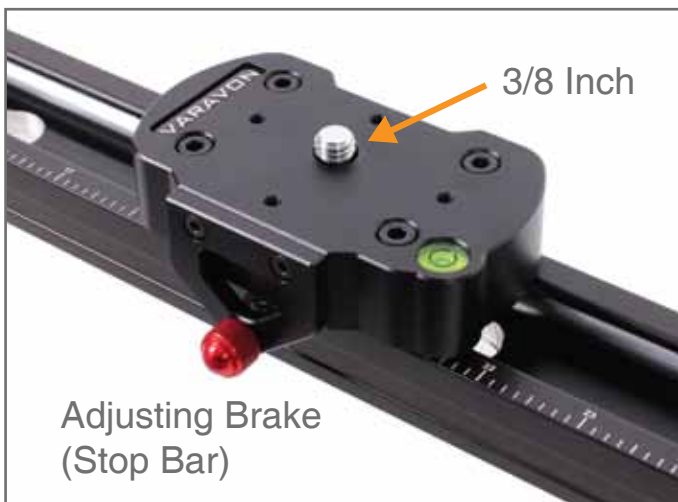

MODEL & SPECIFICATION


**Slidecam S of various sizes.
Body of Aluminum Alloy**

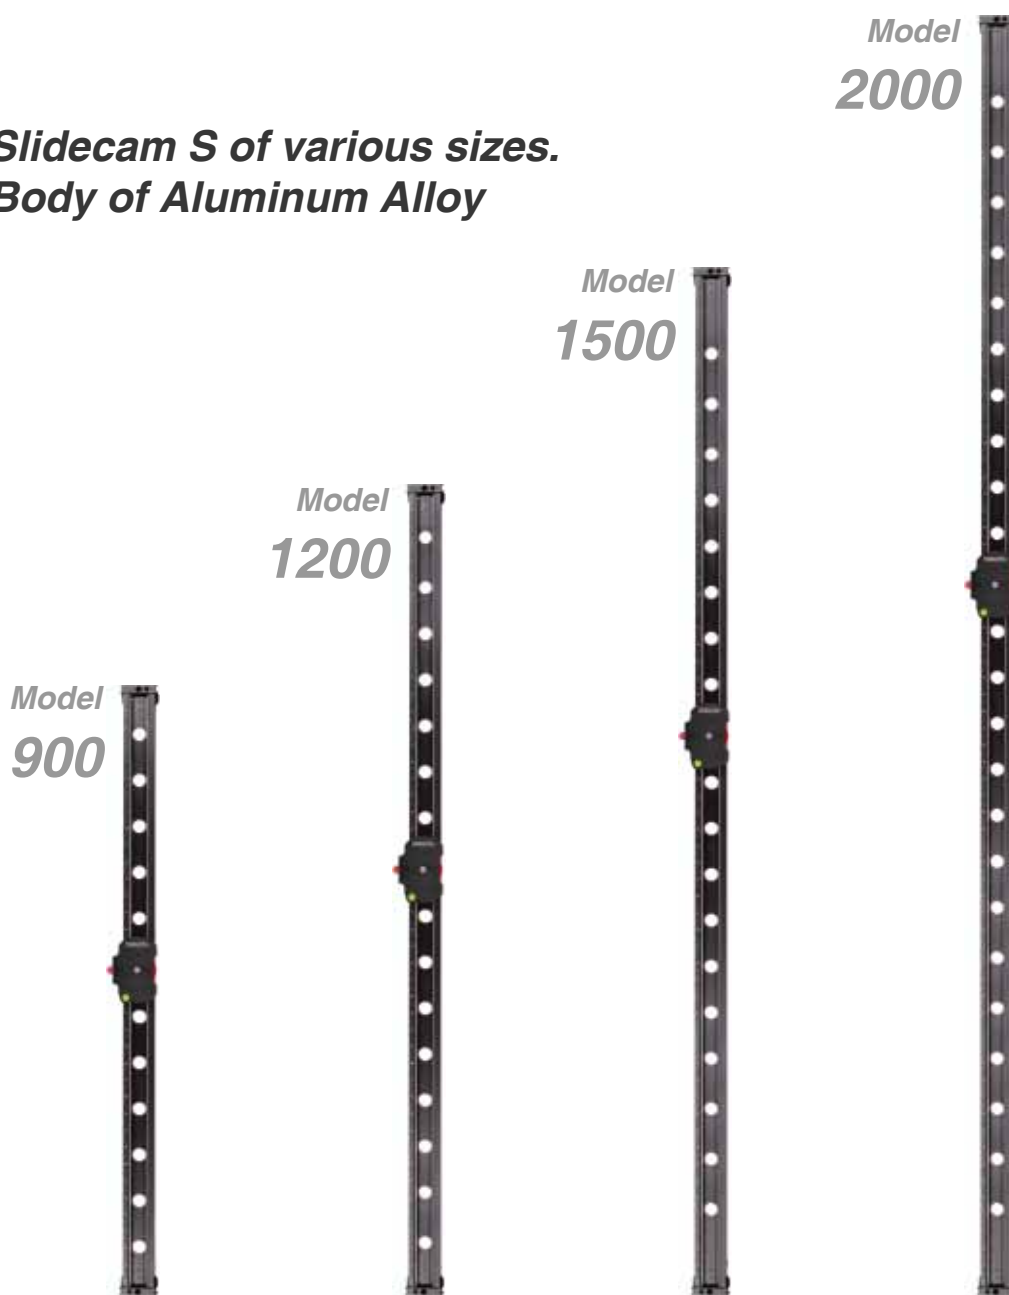

mm	900	1200	1500	2000
inch	36	48	60	78
ft	3	4	5	6.6
Weight(kg)	2.56	3.44	4.1	5.2
Width (mm/inch)	47 / 1.9			
Max Load (kg/lb)	19 / 42			
Material	Aluminum Alloy / Steel			

SLIDER APPLICATION

Function of the Hole 1/4 inch, 3/8 inch

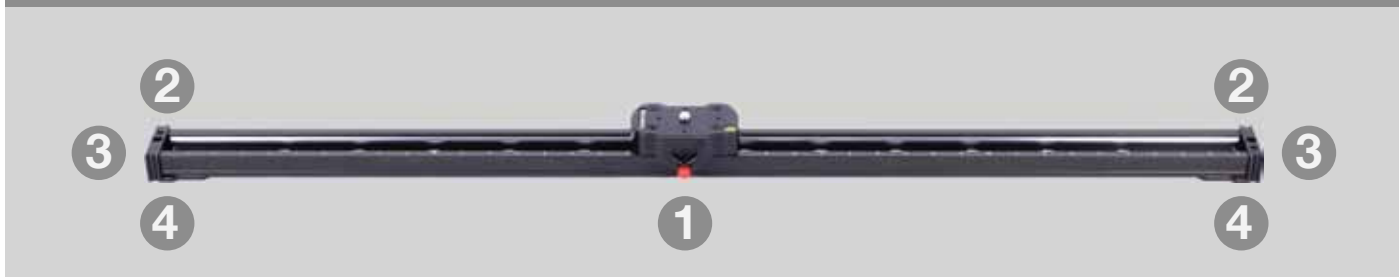

① Slope Shoot
Vertical Shoot

② Flip Shoot

③ Vertical Shoot
Slope Shoot

④ Slope Shoot



Flip Shoot

Vertical Shoot

Slope Shoot

APPLY DIVERSE CAMERAS



More stable and perfect sliding



JVC HM100



Canon 5D Mark III



Sony DSC-P150




Canon C300

TENSION TUNING


NOTE

Adjust Tension

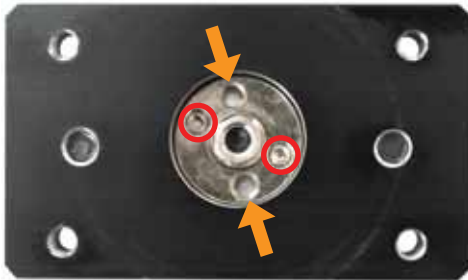

○ Roller Bolt

Loosen

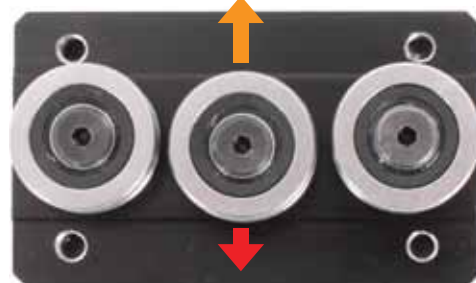

Tight


* Very precise work is needed for tension adjustment.

STEP 01



Use wrench to loosen 4 bolts on the block.

STEP 02

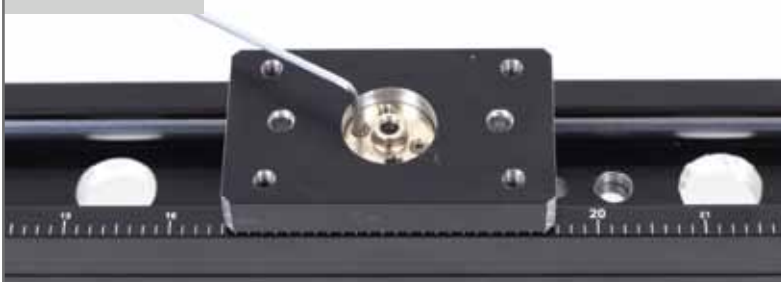


Roller Bolt

Loosen the bolt on the center.

TENSION TUNING

STEP 03

Long Nose

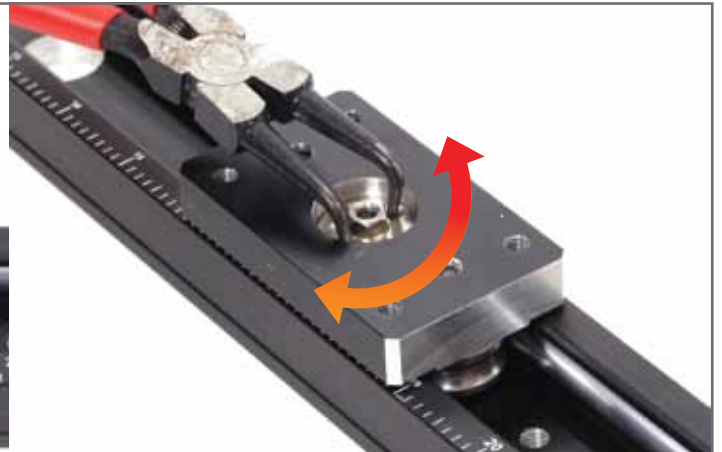

TOP

Tight



Loosen

BOTTOM

Loosen



Tight

Move the roller so you can adjust tension.

STEP 05



Tighten the bolt on the center.

STEP 06



Use wrench to tight 4 bolts on the block.